


Getting Started

1. Insert the SIM card into the SIM card socket



2. Slide the SIM lock switch to lock the SIM card

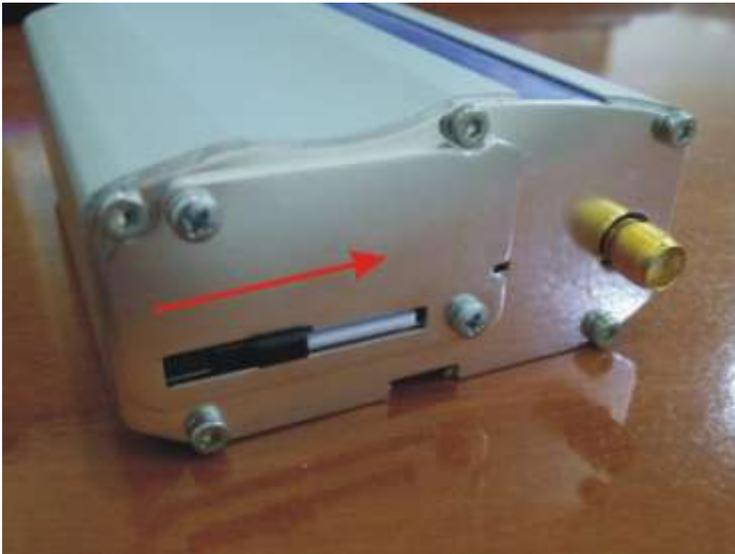

3. Connect the antenna to the main RF connector



4. Plug in mini-USB interface & Power Supply into modem



5. Connect Power Supply to electric power




6. Make sure LED indicator is on




7. Connect USB Cable into PC / Laptop



8. Open **Control Panel** -> **System** -> **Hardware** -> **Device Manager** -> **Modem** -> right click **Sierra Wireless Device** -> **Properties**

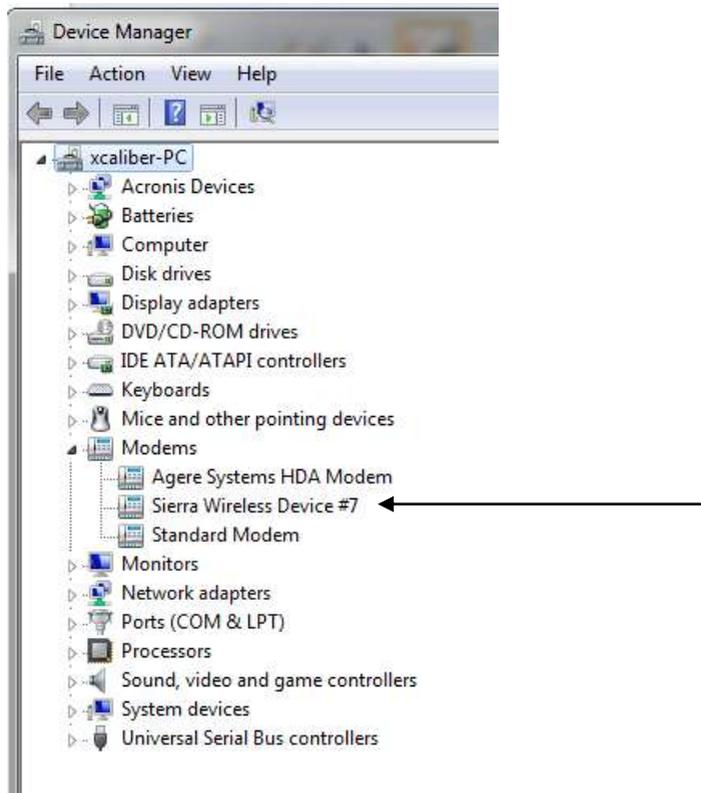

9. Please see COM port number for use in SEMPRO Application
(we recommend that the port used is number 1 - 10)

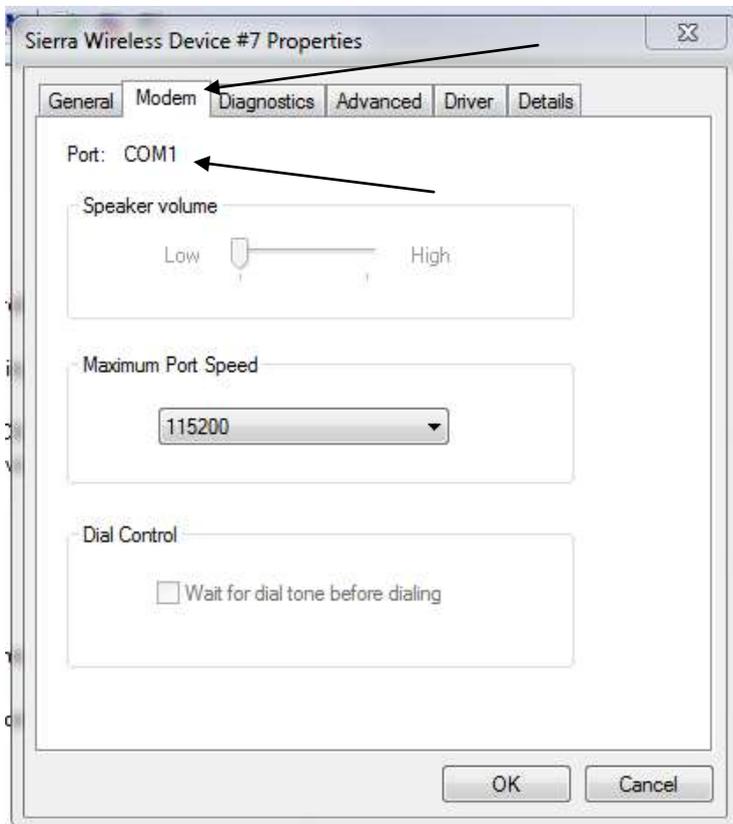

10. If COM port number not in 1 – 10, we must change into that :

- Click Advanced Port Setting
- Choose COM Port Number

(make sure the COM Port number you choosed not in used)

